


Simple and easy frame solution that accepts a wide range of sign substrates, including plastic and aluminum inserts. Frames can be completely customized by selecting the appropriate frame pairs that match your project requirements. Frames are available preassembled or sold in length pairs and are available in two distinctive edge profile designs.


Fabrication Note: Due to sign insert expansion and contraction, the insert should be .085" less than the sign frame's interior size. For example: an 8"x 8" frame insert would be: 7.915" x 7.915".

Features:

- » Frame Material: anodized aluminum
- » Indoor and outdoor weatherable
- » Substrate thickness: 0-1/8" / 0-3.2 mm
- » Installation method: screws or tape
- » Comes assembled with snap locks
- » Extra snap locks are available for purchase
- » Sold individually

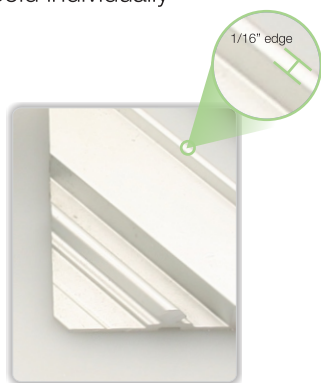

Streamline 100 metal frame system: stock lengths				
Size		Quantity per package	Color	
			Nighthawk Black	Anodized Silver
3 inch	(76mm)	1 pair	X	X
4 inch	(101mm)	1 pair	X	X
5 inch	(127mm)	1 pair	X	X
6 inch	(152mm)	1 pair	X	X
7 inch	(177mm)	1 pair	X	X
8 inch	(203mm)	1 pair	X	X
8.5 inch	(215mm)	1 pair	X	X
9 inch	(228mm)	1 pair	X	X
10 inch	(254mm)	1 pair	X	X
11 inch	(279mm)	1 pair	X	X
12 inch	(304mm)	1 pair	X	X
18 inch	(457mm)	1 pair	X	X



SNAP LOCK TECHNOLOGY




Snap Lock Technology was developed to assist in easy sign face insertion, removal, and replacement.

The positive locking button snaps securely into the frame slot. Each snap lock has a pressure sensitive adhesive tab to hold the sign insert securely in place and provide tamper-resistant signage.

The combined technology of the Snap Lock and Streamline metal frames is a designer's first choice for a reliable frame system.



Snap Lock

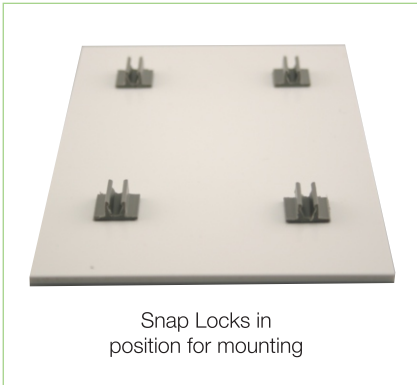

Snap Locks in position for mounting

Figure 1 - Snap Lock profile view


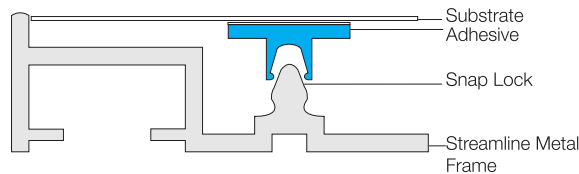


Figure 2 - Snap Lock 3-D view




mounting

Traditionally, signs have been mounted directly to the wall using double sided tape. While this works, it is not an ideal solution in the long run when the signage needs to be updated, or a wall needs to be repainted. Portico Poly Frames simplify this by utilizing a keyhole mounting system for installing screws and drywall anchors.


Here's how it works:

The frame hangs by the keyholes on standard screws and drywall anchors, or whatever hardware is appropriate for your project. When it is time to replace or repaint around the sign, pull the sign insert out with a suction cup, loosen the screws and remove the frame from the wall.



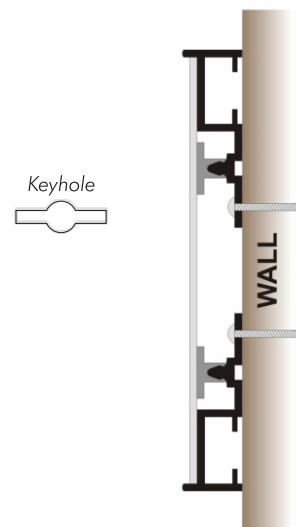

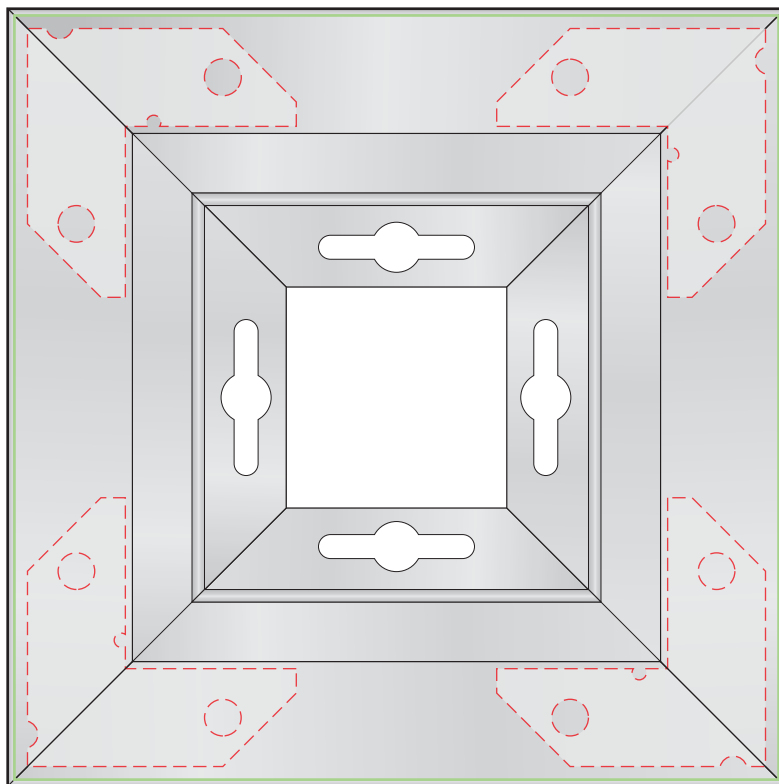

Quick, easy, and the wall and signage stay in tact.



Scale: 4" x 4" Frame - Actual Size
 Dimensions below are based on this frame sample



KEY

	Outside Frame Edge	4 1/16" x 4 1/16"
	Frame Edge Thickness	1/16"
	Sign Substrate Dimension	3.915" x 3.915"
	Sign Substrate Thickness	1/16"
	Inside Frame Edge	4" x 4"
	Frame Thickness	1/2"

